

# Dry Barrel Fire Hydrants



# Series 27 Dry Barrel Fire Hydrants


Meets or Exceeds the AWWA C502 Standard

## FEATURES

- Modern or nostalgic styles available with interchangeable internal parts
- UL/ULC listed and FM approved
- High pressure rating — 250 PSI
- High strength ductile iron nozzle section, barrel section and base
- 5 1/4" valve opening for high flow rating
- Hydrant top repairable under pressure
- 360 degree nozzle section rotation
- Replaceable nozzles secured with external stainless steel lock screw
- Light-weight, inexpensive hydrant tools
- Traffic flange designed for easy repair
- Stainless steel traffic coupling designed for longer operational life (resists elongation) and high corrosion resistance
- 360 degree all bronze drain channel, fast draining
- Travel stop nut in the nozzle section for additional safety (optional)
- Inlet shoe can be changed without dismantling hydrant — available in most configurations (MJ, FL, PO, PE)
- New tensile resistant polyethylene shoe connection available
- Hydrant shoe and nozzle section are epoxy lined and coated
- Hydrant drain easily plugged if required — may be plugged internally or externally
- Extensions available in lengths from 6" to 60"
- Stainless steel upper stem standard; lower stainless steel stem available

## AVK FULLY ENCAPSULATED ONE-PIECE HYDRANT MAIN VALVE

- Patented AVK design — one piece replaces up to 13 pieces
- Ductile iron core fully encapsulated in EPDM rubber
- No exposed metal — completely corrosion resistant (bottom stops of stainless steel)
- Easy maintenance
- Cost-effective, labor saving — reduced inventory
- UL/ULC listed and FM approved

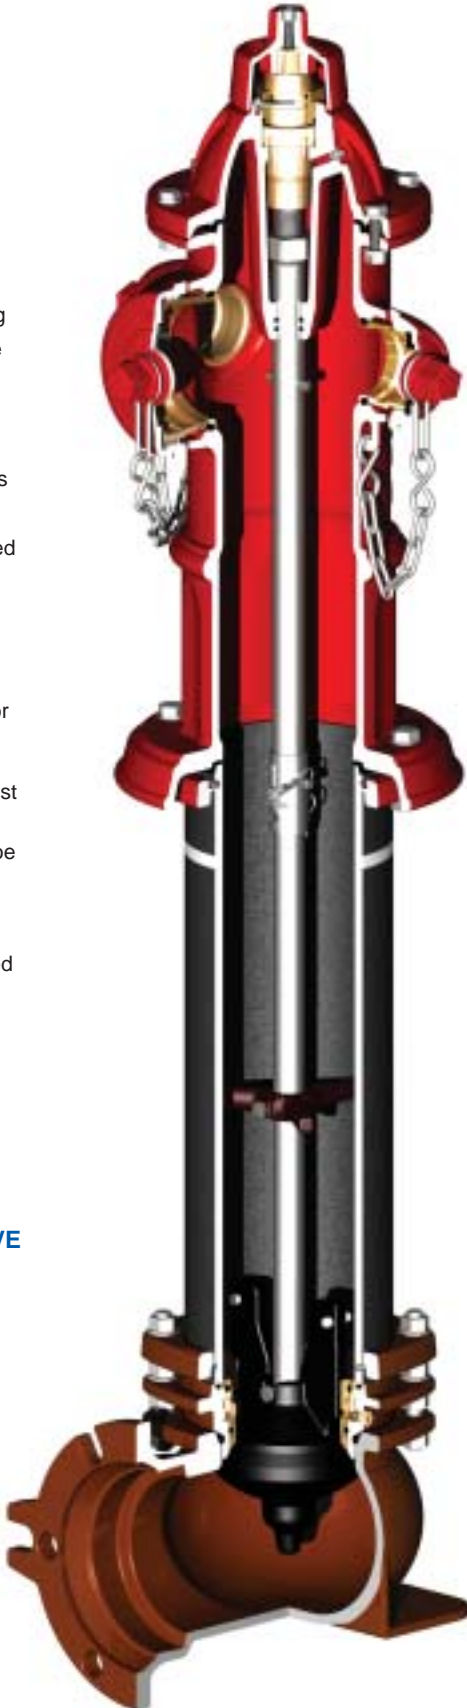

## Another AVK Innovation Series 18 Combi-Tee Valve:

- Push-on or MJ connection  
Sizes: • 6"x6" • 8"x6" • 12"x6"
- Time saving installation and competitive pricing
- Designed for lateral hydrant installations off main lines
- Main line laying length to AWWA C-110
- Gate valve to AWWA C-509
- Epoxy coated inside and out to AWWA C-550

**American AVK  
Commitment:  
Quality Products —  
Delivered On Time**

## High Quality:

- Products are proudly MADE IN AMERICA
- Tested to AWWA, UL, ULC, and FM requirements
- All products covered by a ten (10) year warranty

## Product Range:

- All standard end configurations available
- Size range: NRS gate valves 1" - 24"
- Size range: OS&Y gate valves 2 1/2" - 12"
- Size range: post indicator gate valves 4" - 12"
- GENUINE Class 250 psi resilient wedge gate valves available — NRS 4" - 12"
- 18" - 24" NRS Resilient Wedge Gate valves utilizing the exclusive AVK PowerSaver® feature for reduced operating torque

## American AVK Company Locations To Serve You:

Fresno, CA

Tel: (559) 452-4310

Fax: (559) 452-4349

N. Charleston, SC

Tel: (843) 552-5557

Fax: (843) 552-8852

Dallas, TX

Tel: (559) 452-4310

Fax: (559) 452-4349

**AVK**  
**AMERICAN AVK COMPANY**  
www.americanavk.com